


# technovel

Technovel's SZW05 is the standard Single Screw Extruder and is designed for pellets, film/sheet, tube/pipe, profile, corrugated tube/pipe, mono-filament, and for feed melted material into a multi-screw feeder. Achieve high quality with multi-layers or multi-colored operations.

The Single Screw Extruder is designed and manufactured to achieve high-output and high quality products in various fields. This also includes the operation by collaborating with the KZW Series Multi Screw Extruder.

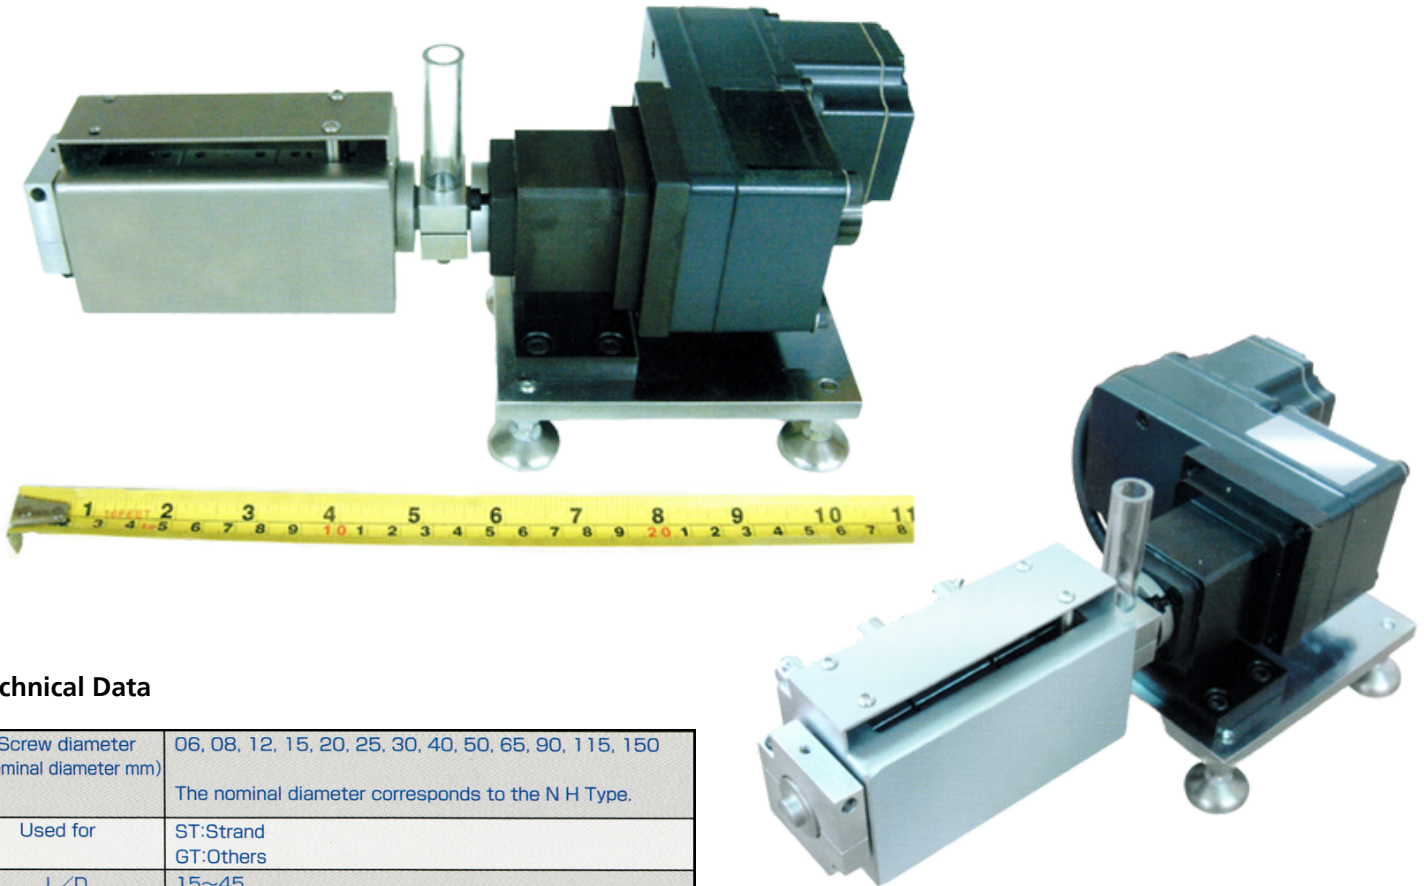

## Technical Data

Screw diameter (Nominal diameter mm)	06, 08, 12, 15, 20, 25, 30, 40, 50, 65, 90, 115, 150 The nominal diameter corresponds to the N H Type.
Used for	ST:Strand GT:Others
L/D	15~45
Grade*	MG:Normal Operation VG:Vent Operation
Screw rpm	STD:60~100rpm MIS:101~300rpm HSS:301~600rpm

Technovel Corporation: 7 Chome-8-5 Higashinakahama, Joto Ward, Osaka, 536-0023, Japan

317 Willow Street, Gastonia, NC 28054 | P 866.553.3330 | F 715.254.9490 | [www.orbetron.com](http://www.orbetron.com)